


Vacuum air pump 真空泵  
Built-In Type & Small Capacity

# DBM25B / 30B / 40B

UL No. E257514




## ► Dimensions (mm) 外形尺寸 :

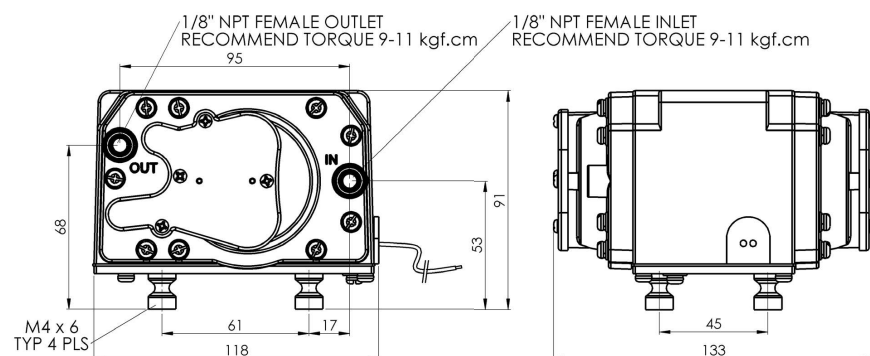

## ► Specifications 規格 :

| Model<br>型號 | Voltage<br>電壓<br>(VAC) | Frequency<br>頻率<br>(HZ) | Rated Pressure<br>額定壓力 |      | Air Flow<br>風量 |      | AMP<br>安培<br>(A) | Watt<br>瓦特<br>(w) | Max.<br>Vacuum<br>最大吸力<br>(mBar) | Noise<br>噪音<br>(dBA) | Weight<br>重量 |      |
|-------------|------------------------|-------------------------|------------------------|------|----------------|------|------------------|-------------------|----------------------------------|----------------------|--------------|------|
|             |                        |                         | kg/cm <sup>2</sup>     | PSI  | LPM            | CFM  |                  |                   |                                  |                      | kg           | lb   |
| DBM25B      | 110-120                | 60                      | 0.13                   | 1.85 | 25             | 0.88 | 0.2              | 17                | 250                              | 48                   | 1.7          | 3.75 |
| DBM25B      | 220-240                | 50                      | 0.13                   | 1.85 | 22             | 0.78 | 0.06             | 11                | 240                              |                      |              |      |
| DBM30B      | 110-120                | 60                      | 0.13                   | 1.85 | 35             | 1.24 | 0.3              | 28                | 325                              |                      |              |      |
| DBM30B      | 220-240                | 50                      | 0.13                   | 1.85 | 33             | 1.17 | 0.13             | 24                | 300                              |                      |              |      |
| DBM30B      | 24                     | 60                      | 0.13                   | 1.85 | 36             | 1.27 | 1.5              | 28                | 340                              |                      |              |      |
| DBM30B      | 24                     | 50                      | 0.13                   | 1.85 | 34             | 1.2  | 1.3              | 23                | 305                              |                      |              |      |
| DBM30B      | 12VDC                  | 50/60                   | 0.13                   | 1.85 | 30             | 1.06 | 2.6              | 31                | 320                              |                      |              |      |
| DBM30B      | 24VDC                  | 50/60                   | 0.13                   | 1.85 | 30             | 1.06 | 1.2              | 27                | 295                              |                      |              |      |
| DBM40B      | 110-120                | 60                      | 0.13                   | 1.85 | 44             | 1.55 | 0.41             | 35                | 360                              |                      |              |      |
| DBM40B      | 220-240                | 50                      | 0.13                   | 1.85 | 42             | 1.48 | 0.2              | 32                | 330                              |                      |              |      |
| DBM40B      | 24                     | 50                      | 0.13                   | 1.85 | 44             | 1.55 | 2.1              | 32.5              | 330                              |                      |              |      |

## ► Performance Curve 性能曲線 :

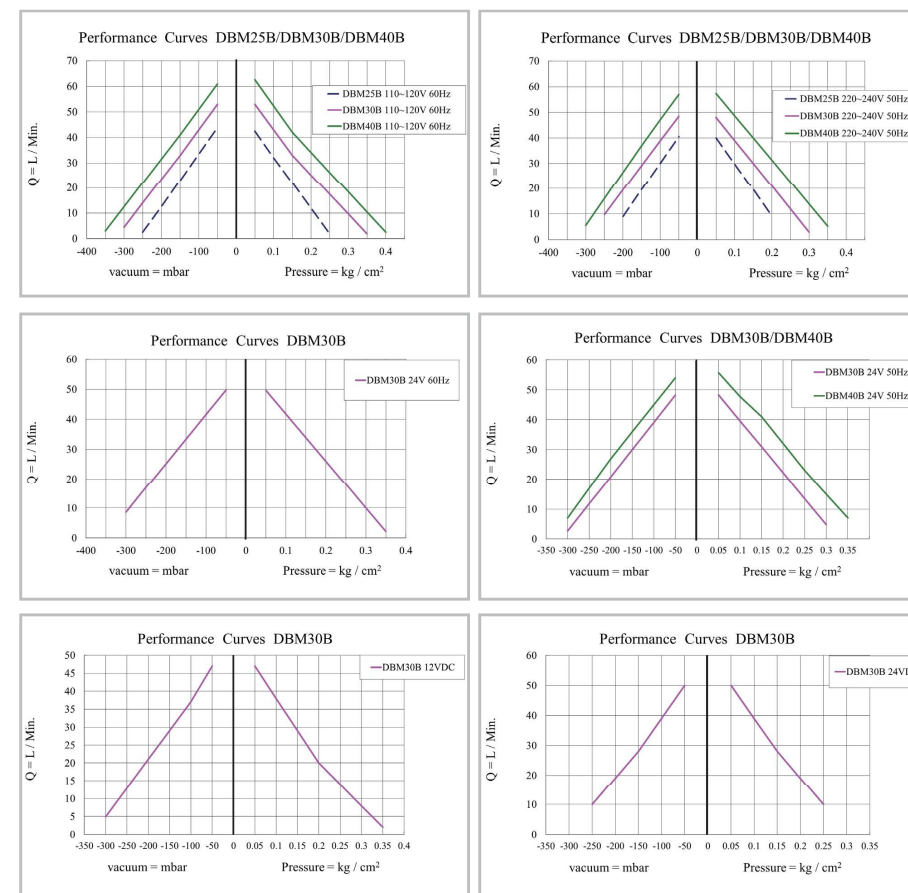

\*The performance has  $\pm 5\%$  allowance and all values are only for reference.  
\*The ambient temperature for linear air pumps is  $-10^{\circ}\text{C}$  to  $40^{\circ}\text{C}$ .

\*性能數據有  $\pm 5\%$  的允許值，數據僅供參考。  
\*鼓風機可使用的環境溫度於  $-10^{\circ}\text{C}$  到  $40^{\circ}\text{C}$ 。