


Vacuum air pump 真空泵
Built-In Type & Small Capacity

DM5S / 10S / 12S

UL No. E257514




► Dimensions (mm) 外形尺寸：

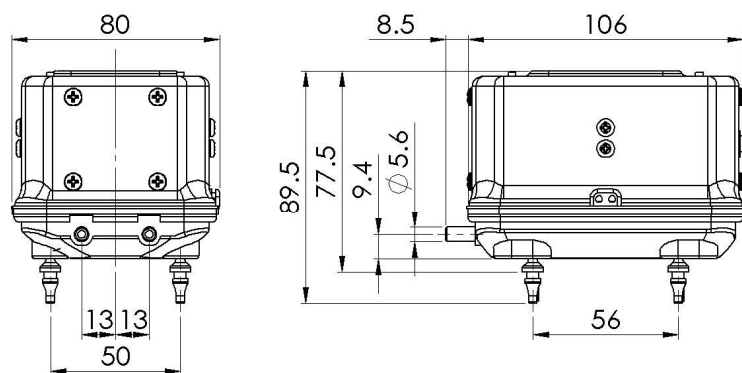

► Specifications 規格：

Model 型號	Voltage 電壓 (VAC)	Frequency 頻率 (HZ)	Rated Pressure 額定壓力		Air Flow 風量		AMP 安培 (A)	Watt 瓦特 (w)	Max. Vacuum 最大吸力 (mBar)	Noise 噪音 (dBA)	Weight 重量			
			kg/cm²	PSI	LPM	CFM					kg	lb		
DM5S	110-120	60	0.04	0.57	10	0.35	0.12	9	205	32	0.75	1.65		
DM5S	220-240	50	0.04	0.57	8	0.28	0.06	9	170					
DM5S	12	60	0.04	0.57	10.5	0.37	1.1	7.5	205					
DM5S	12	50	0.04	0.57	8	0.28	1.1	7.5	170					
DM5S	24	60	0.04	0.57	9.8	0.35	0.6	7.5	200					
DM5S	24	50	0.04	0.57	8.3	0.29	0.6	7	170					
DM10S	110-120	60	0.1	1.42	10.5	0.37	0.1	10	245	35				
DM10S	220-240	50	0.1	1.42	9	0.32	0.05	9	210					
DM10S	12	60	0.1	1.42	10.5	0.37	1	9	235					
DM10S	12	50	0.1	1.42	9.5	0.34	1	8	180					
DM10S	24	60	0.1	1.42	9.5	0.34	0.5	8	235					
DM10S	24	50	0.1	1.42	8.3	0.29	0.5	7.5	190					
DM10S	12VDC	50/60	0.1	1.42	10	0.35	1.2	15	250					
DM12S	220-240	50	0.1	1.42	12	0.42	0.1	15	290					
DM12S	12	50	0.1	1.42	12	0.42	2	15	300					
DM12S	24	50	0.1	1.42	12	0.42	0.8	12.5	240					
DM12SL	24VDC	50/60	0.1	1.42	12	0.42	0.65	16	280					

► Performance Curve 性能曲線：

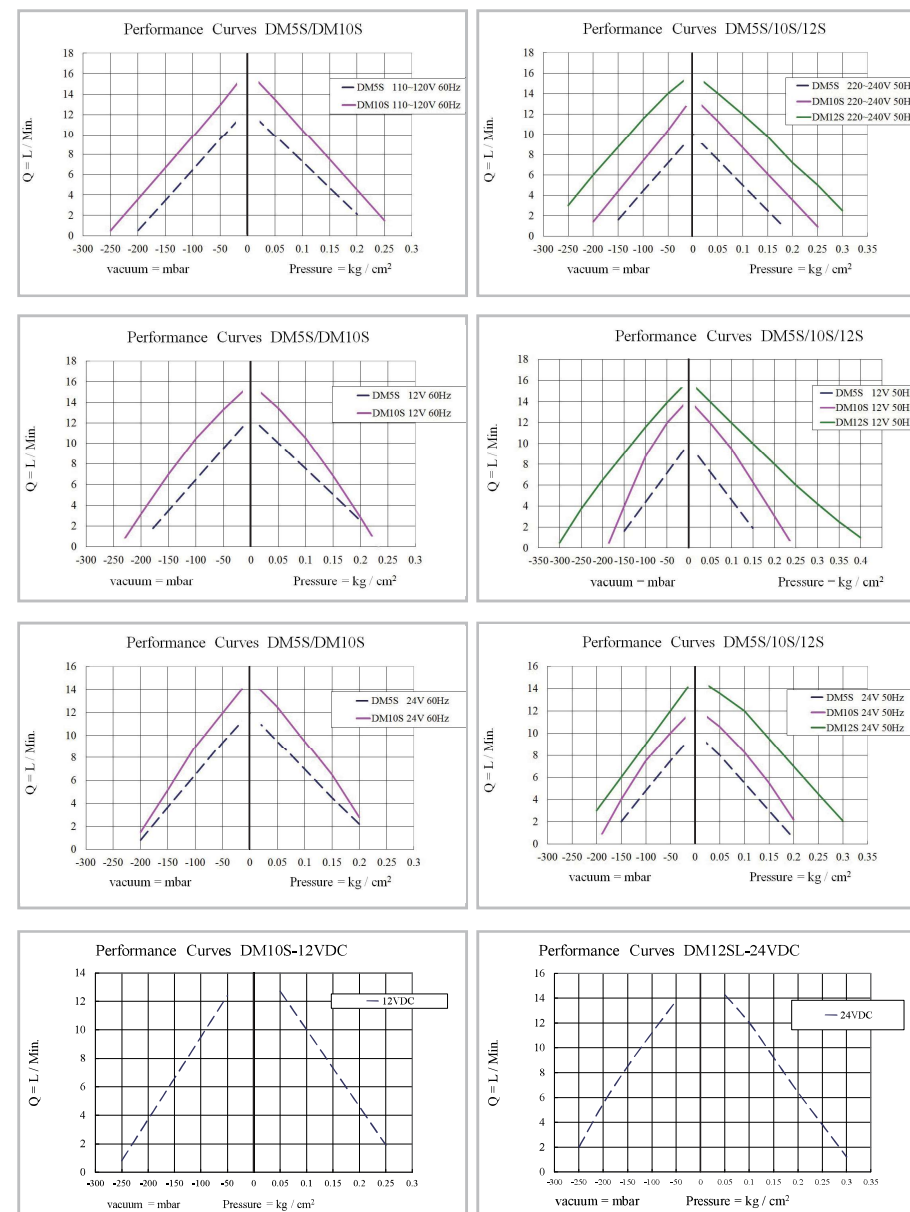

*The performance has $\pm 5\%$ allowance and all values are only for reference.
*The ambient temperature for linear air pumps is -10°C to 40°C .

*性能數據有 $\pm 5\%$ 的允許值，數據僅供參考。
*鼓風機可使用的環境溫度於 -10°C 到 40°C 。